

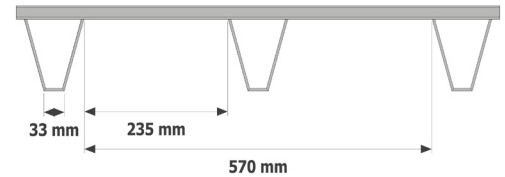
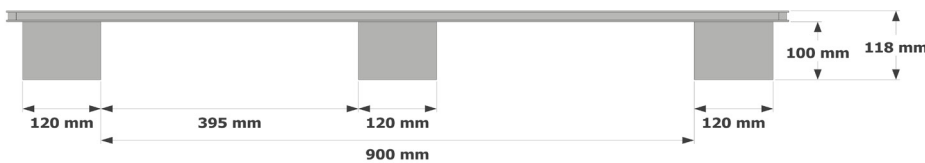
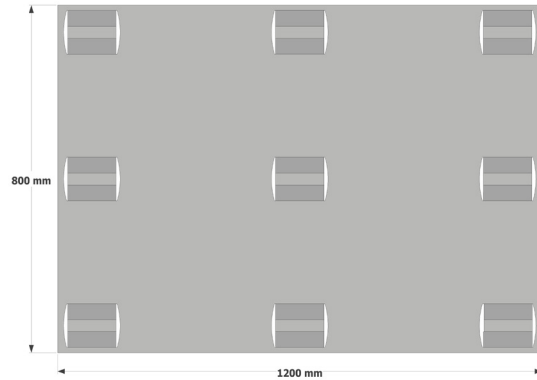
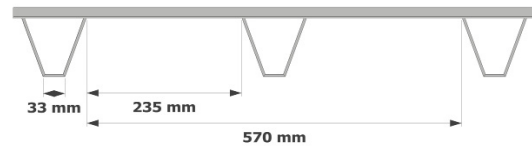


# B4B Euro

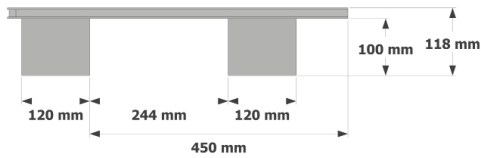

|                               |                    |   |
|-------------------------------|--------------------|---|
| Length                        | 1200 mm            | Tolerance +/- 3 mm  |
| Width                         | 800 mm             | Tolerance +/- 3 mm  |
| Height                        | 118 mm             | Tolerance + 7 mm / - 0 mm   |
| Entry height                  | 100 mm             | Tolerance + 5 mm/ - 0 mm  |
| Strength of deck              | 18 mm              | Tolerance + 2 mm/ - 0 mm  |
| Entry width front             | 570 mm             |   |
| Entry width side              | 900 mm             |   |
| Number of legs                | 9                  |   |
| Dynamic load carrying ability | 900 kg             | Results from testing, spread out load (based of test per leg)                 |
| Static load carrying ability  | 4,500 kg           |   |
| Average weight                | 7.3 kg             |   |
| Material moisture content     | 5-13 %             |   |
| ISPM 15                       | Non-wood           | No need for any labeling or treatment   |
| Formaldehyd                   | Emissions class E1 |   |
| Type of glue                  | Formaldehyd free   |   |
| Packaging units               | 100 units          | Every 25 pallets there is a 12 mm room holder for easy speration per forklift |
| Height per packaging unit     | ~ 2.15 m           |   |
| Weight per packaging unit     | ~ 730 kg           |   |
| Stacks per truckload          | 32 x 100 = 3,200   |   |
| Weight per load               | ~ 23 t             |   |

# B4B Half

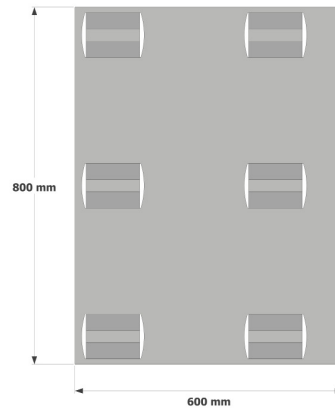

|                               |                    |   |
|-------------------------------|--------------------|---|
| Length                        | 800 mm             | Tolerance +/- 3 mm  |
| Width                         | 600 mm             | Tolerance +/- 3 mm  |
| Height                        | 118 mm             | Tolerance + 7 mm / - 0 mm   |
| Entry height                  | 100 mm             | Tolerance + 5 mm/ - 0 mm  |
| Strength of deck              | 18 mm              | Tolerance + 2 mm/ - 0 mm  |
| Entry width front             | 450 mm             |   |
| Entry width side              | 570 mm             |   |
| Number of legs                | 6                  |   |
| Dynamic load carrying ability | 400 kg             | Results from testing, spread out load (based of test per leg)                 |
| Static load carrying ability  | 2,000 kg           |   |
| Average weight                | 3.6 kg             |   |
| Material moisture content     | 5-13 %             |   |
| ISPM 15                       | Non-wood           | No need for any labeling or treatment   |
| Formaldehyd                   | Emissions class E1 |   |
| Type of glue                  | Formaldehyd free   |   |
| Packaging units               | 200 units          | Every 25 pallets there is a 12 mm room holder for easy speration per forklift |
| Height per packaging unit     | ~ 2.15 m           |   |
| Weight per packaging unit     | ~ 720 kg           |   |
| Stacks per truckload          | 32 x 200 = 6,400   |   |
| Weight per load               | ~ 23 t             |   |