

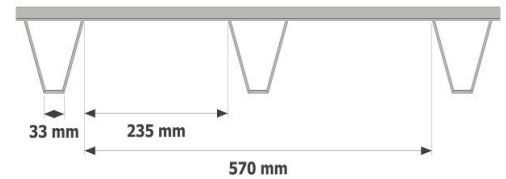
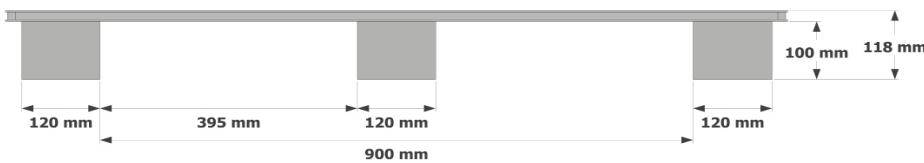
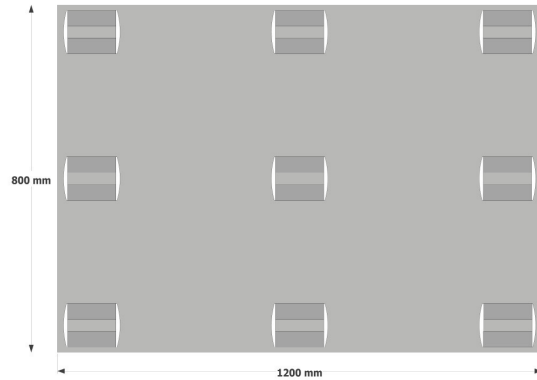
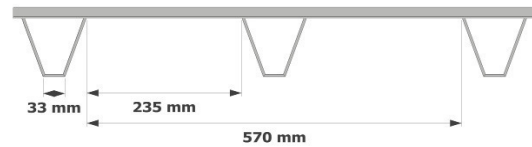


B4B Euro

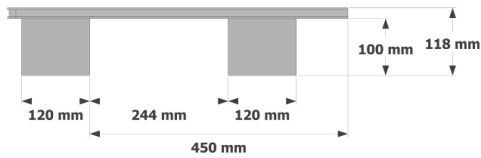

Length	1200 mm	Tolerance +/- 3 mm
Width	800 mm	Tolerance +/- 3 mm
Height	118 mm	Tolerance + 6 mm / - 0 mm
Entry height	100 mm	Tolerance + 5 mm/ - 0 mm
Strength of deck	18 mm	Tolerance + 1 mm/ - 0 mm
Entry width front	570 mm	
Entry width side	900 mm	
Number of legs	9	
Dynamic load carrying ability	900 kg	Results from testing, spread out load (based of test per leg)
Static load carrying ability	4,500 kg	
Average weight	5.5 kg	
Material moisture content	5-13 %	
ISPM 15	Non-wood	No need for any labeling or treatment
Formaldehyd	Emissions class E1	
Type of glue	Formaldehyd free	
Packaging units	100 units	Every 50 pallets there is a 10 mm room holder for easy speration per forklift
Height per packaging unit	~ 2.10 m	
Weight per packaging unit	~ 550 kg	
Pallets per truckload	3,300	
Weight per load	~ 18.2 t	

B4B Half

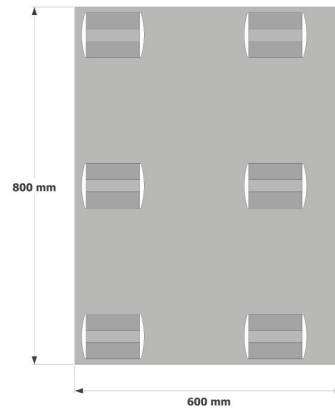

Length	800 mm	Tolerance +/- 3 mm
Width	600 mm	Tolerance +/- 3 mm
Height	118 mm	Tolerance + 6 mm / - 0 mm
Entry height	100 mm	Tolerance + 5 mm/ - 0 mm
Strength of deck	18 mm	Tolerance + 1 mm/ - 0 mm
Entry width front	450 mm	
Entry width side	570 mm	
Number of legs	6	
Dynamic load carrying ability	400 kg	Results from testing, spread out load (based of test per leg)
Static load carrying ability	2,000 kg	
Average weight	3.2 kg	
Material moisture content	5-13 %	
ISPM 15	Non-wood	No need for any labeling or treatment
Formaldehyd	Emissions class E1	
Type of glue	Formaldehyd free	
Packaging units	200 units	Every 50 pallets there is a 10 mm room holder for easy speration per forklift
Height per packaging unit	~ 2.10 m	
Weight per packaging unit	~ 640 kg	
Stacks per truckload	6,600	
Weight per load	~ 21.2 t	